

THREE-PHASE-ASYNCHRONOUS-MOTOR FCA 80 B 6 /HE

IE2AC08B60014

General data

Type of motor	3~
Type designation	FCA
Frame size	80
Mounting	B5
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	11.3
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	0.55
Power 1 60Hz (kW)	0.55
Frequency (Hz)	50/60
Voltage 50Hz (V)	230/400
Voltage 60Hz (V)	265/460
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	6
Efficiency 100% 50Hz (%)	73,1
Efficiency 75% 50Hz (%)	73,1
Efficiency 50% 50Hz (%)	71,6
Efficiency 100% 60Hz (%)	68
Power factor	0,72
Starting current factor	4,7
Starting torque factor	2
Tilting moment factor	2,1
Rated current 50Hz (A)	2,62/1,51
Rated current 60Hz (A)	2,45/1,42
Eff.Cl.50Hz	IE2
Eff.Cl.60Hz	IE2

Mechanical data

Torque (Nm)	5,94/4,95
Rotation speed (1/min)	885/1062
Bearing DE	6204.ZZ.C3
Bearing NDE	6204.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	812,5
allow. Radial load (X0)	900
allow. Radial load (Xmax)	725
allow. Axial load B3,B5,B35,B14,B34	775
allow. Axial load V1,V3,V19,V18	745

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM20x1,5 1xblind plug
Cable gland size (option)	M16x1,5
Cable gland type	Standard
Shaft end	19 x 40
Shaft material	C45
Specification NDE	Plastic fan
Flange	200


Additional option

Protection winding	PTC 150°C
--------------------	-----------

Dimension drawings

Three-Phase-Asynchronous- Motor FCA 80 B 6 /HE

IE2AC08B60014

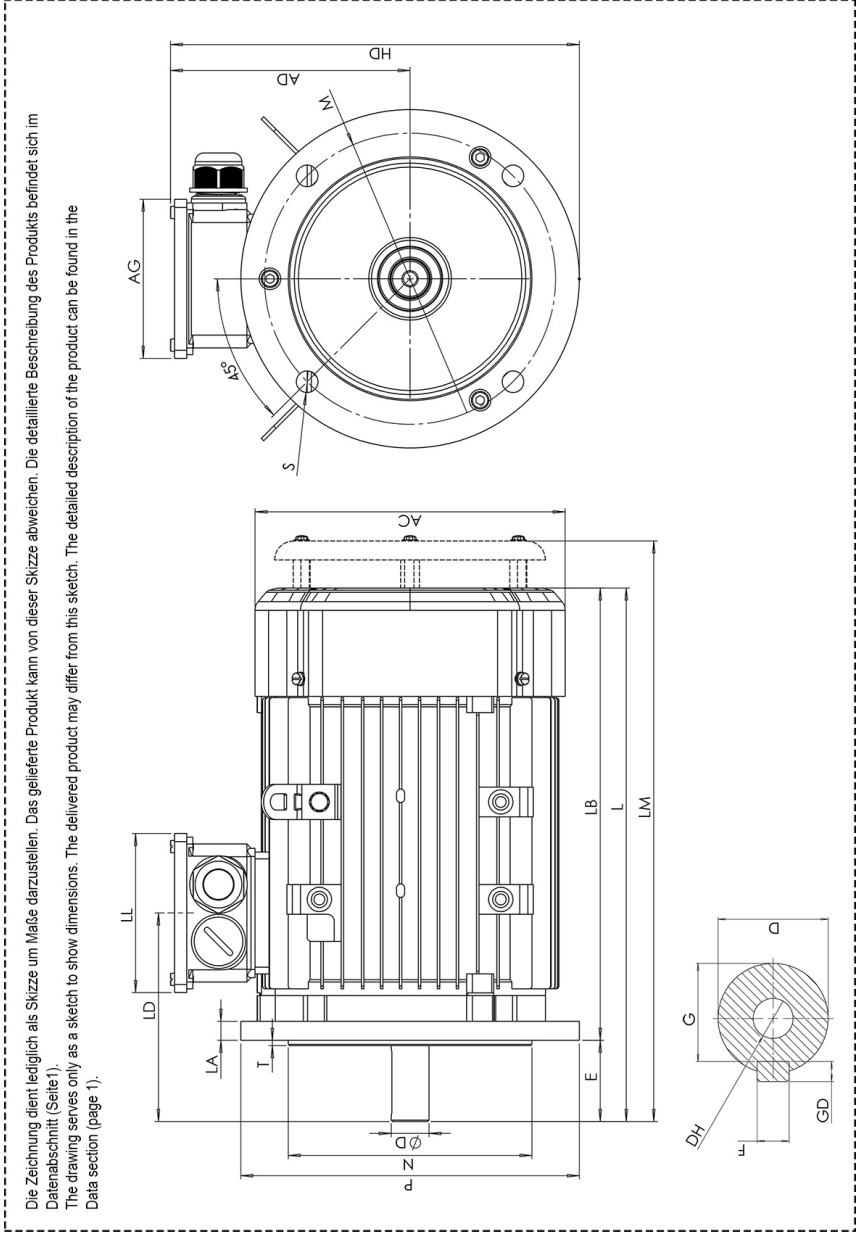

AC	AD	AG	D	E	HD	L	LM	LA	LB	LL	M	N	P	S	T	F	G	DH	EB	ED	GD
155	124	101	19	40	224	277	307	12	237	101	165	130	200	4x12	3.5	6	15.5	M6x16	30	5	6