

THREE-PHASE-ASYNCHRONOUS-MOTOR FCA 71 C 4

IE2AC07B6202

General data

Type of motor	3~ progressiv
Type designation	FCA
Frame size	71
Mounting	B14a
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	8.4
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	0.55
Power 1 60Hz (kW)	0.55
Frequency (Hz)	50/60
Voltage 50Hz (V)	230/400
Voltage 60Hz (V)	265/460
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	4
Efficiency 100% 50Hz (%)	77,1
Efficiency 75% 50Hz (%)	77,1
Efficiency 50% 50Hz (%)	75,6
Efficiency 100% 60Hz (%)	75,5
Power factor	0,75
Starting current factor	5,2
Starting torque factor	2,3
Tilting moment factor	2,3
Rated current 50Hz (A)	2,39/1,38
Rated current 60Hz (A)	2,12/1,23
Eff.Cl.50Hz	IE2
Eff.Cl.60Hz	IE2

Mechanical data

Torque (Nm)	3,75/3,75
Rotation speed (1/min)	1400/1680
Bearing DE	6202.ZZ.C3
Bearing NDE	6202.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	412
allow. Radial load (X0)	450
allow. Radial load (Xmax)	375
allow. Axial load B3,B5,B35,B14,B34	400
allow. Axial load V1,V3,V19,V18	380
Moment of inertia	0,0008

Motor properties


Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM20x1,5 1xblind plug
Cable gland type	Standard
Shaft end	14 x 30
Shaft material	C45
Specification NDE	Plastic fan
Flange	105

Additional operating points

Voltage operating point 2	265/460
Power operating point 2 (kW)	0.66
Connection operating point 2	Δ/Y
Frequency operating point 2	60

Dimension drawings

Three-Phase-Asynchronous-Motor FCA 71 C 4 IE2AC07B6202

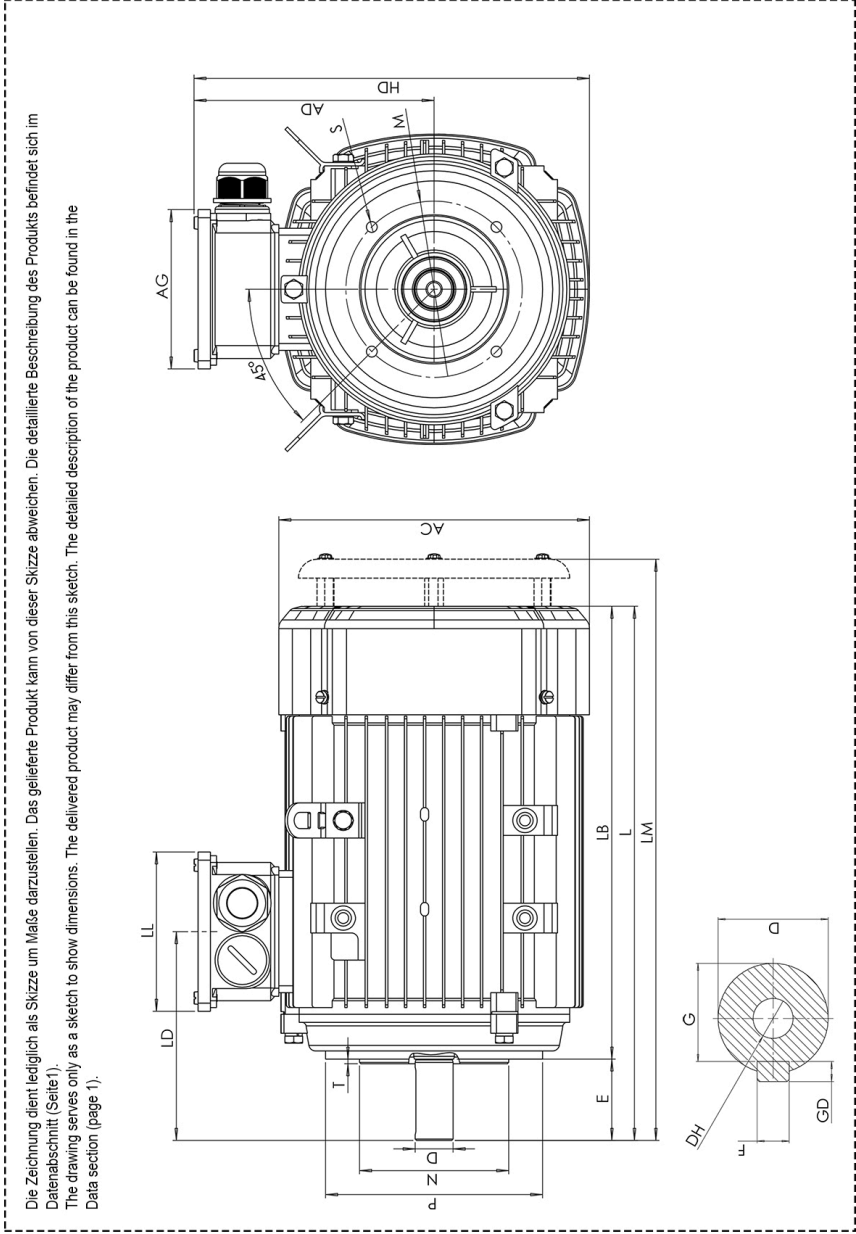

AC	AD	AG	D	E	HD	L	LM	LA	LB	LL	M	N	P	S	T	F	G	DH	EB	ED	GD
136	109	101	14	30	177	245	275	10	215	101	85	70	105	M6	3.5	5	11	M5x12	25	2.5	5