

THREE-PHASE-ASYNCHRONOUS-MOTOR E3-ASA 132 SA 2

IE3UM13S2000

General data

Type of motor	3~ explosion proof
Type designation	E3-ASA
Frame size	132
Mounting	B5
Frame execution	S
Frame material	Grauguß
Insulationclass	F/F
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	89
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034 -1, EN 60079-0/-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	5.5
Power 1 60Hz (kW)	6.33
Frequency (Hz)	50/60
Voltage 50Hz (V)	400/690
Voltage 60Hz (V)	460/-
Voltage/Frequency tolerance (not valid for range voltage)	+/-5%
Connection	Δ/Y
Poles	2
Efficiency 100% 50Hz (%)	89,2
Efficiency 75% 50Hz (%)	88,9
Efficiency 50% 50Hz (%)	86,6
Efficiency 100% 60Hz (%)	89,5
Efficiency 75% 60Hz (%)	88,9
Efficiency 50% 60Hz (%)	86,6
Power factor	0,82
Starting current factor	7,8
Starting torque factor	3,0
Tilting moment factor	3,2
Rated current 50Hz (A)	10,70/6,20
Rated current 60Hz (A)	10,70
Eff.Cl.50Hz	IE3

Electrical specification

Eff.Cl.60Hz	IE3
-------------	-----

Mechanical data

Torque (Nm)	17,90/21,48
Rotation speed (1/min)	2934/3521
Bearing DE	
Bearing NDE	
Mounting of bearing DE	fixed bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	1312
allow. Radial load (X0)	1475
allow. Radial load (Xmax)	1150
allow. Axial load B3,B5,B35,B14,B34	1075
allow. Axial load V1,V3,V19,V18	1025
Moment of inertia	0,015375

Motor properties

Color	RAL7030
Paint surface	matt
Protection class	IP55
Cable gland size (cable connection)	M32x1,5
Cable gland size (option)	M20x1,5
Cable gland type	Atex
Shaft end	38 x 80
Shaft material	C45
Specification NDE	Plastic fan
Flange	300

Additional option


Protection winding	PTC 130°C
Atex	II 2G Ex db eb IIC T4 Gb

Dimension drawings

Three-Phase-Asynchronous-

Motor E3-ASA 132 SA 2

IE3UM13S2000

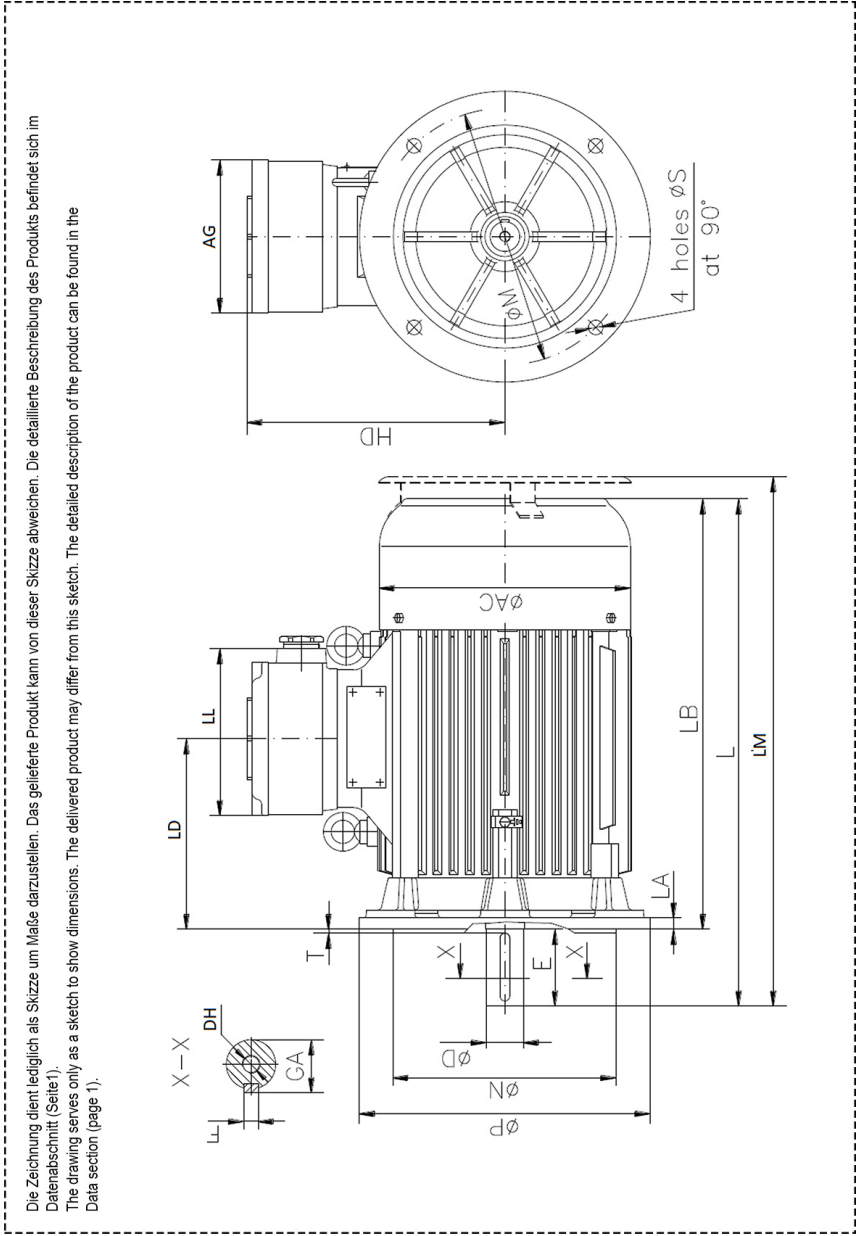

AC	AG	D	E	HD	L	LM	LB	LD	LL	M	N	P	S	T	F	G	DH
263	160	38	80	268	608	646	528	225	175	265	230	300	14,4	4	10	41	M12