

## THREE-PHASE-ASYNCHRONOUS-MOTOR ACA 80 A 4 /HE

IE2AC08A4002

### General data

|                          |                               |
|--------------------------|-------------------------------|
| Type of motor            | 3~                            |
| Type designation         | ACA                           |
| Frame size               | 80                            |
| Mounting                 | B3                            |
| Frame material           | Aluminium                     |
| Insulationclass          | F/B                           |
| Terminal box location    | top DE                        |
| Terminal box orientation | cable gland to the right side |
| Weight (kg)              | 9                             |
| Rotation Direction       | right /left                   |
| Vibration level          | A                             |
| Balancing method         | half key                      |
| cooling type             | IC411                         |
| Executed acc. to         | IEC 60034-1                   |
| noise level              | IEC 60034-9                   |

### Influential factors

|                          |               |
|--------------------------|---------------|
| Duty                     | S1            |
| Ambient temperature (°C) | -20 up to +40 |
| Height of location (m)   | 1000          |

### Electrical specification

|                                                           |           |
|-----------------------------------------------------------|-----------|
| Power 1 50Hz (kW)                                         | 0.55      |
| Power 1 60Hz (kW)                                         | 0.55      |
| Frequency (Hz)                                            | 50/60     |
| Voltage 50Hz (V)                                          | 230/400   |
| Voltage 60Hz (V)                                          | 265/460   |
| Voltage/Frequency tolerance (not valid for range voltage) | +/-10%    |
| Connection                                                | Δ/Y       |
| Poles                                                     | 4         |
| Efficiency 100% 50Hz (%)                                  | 77,1      |
| Efficiency 75% 50Hz (%)                                   | 77,1      |
| Efficiency 50% 50Hz (%)                                   | 75,6      |
| Efficiency 100% 60Hz (%)                                  | 75,5      |
| Power factor                                              | 0,75      |
| Starting current factor                                   | 5,2       |
| Starting torque factor                                    | 2,3       |
| Tilting moment factor                                     | 2,3       |
| Rated current 50Hz (A)                                    | 2,39/1,37 |
| Rated current 60Hz (A)                                    | 2,12/1,23 |
| Eff.Cl.50Hz                                               | IE2       |
| Eff.Cl.60Hz                                               | IE2       |

### Mechanical data

|                                     |               |
|-------------------------------------|---------------|
| Torque (Nm)                         | 3,75/3,13     |
| Rotation speed (1/min)              | 1400/1680     |
| Bearing DE                          | 6204.ZZ.C3    |
| Bearing NDE                         | 6204.ZZ.C3    |
| Mounting of bearing DE              | loose bearing |
| Mounting of bearing NDE             | loose bearing |
| Bearing lifetime                    | 20000         |
| allow. Radial load (X/2)            | 700           |
| allow. Radial load (X0)             | 775           |
| allow. Radial load (Xmax)           | 625           |
| allow. Axial load B3,B5,B35,B14,B34 | 625           |
| allow. Axial load V1,V3,V19,V18     | 595           |
| Moment of inertia                   | 0,0019        |

### Motor properties

|                                     |                        |
|-------------------------------------|------------------------|
| Color                               | RAL7030                |
| Paint surface                       | shiny                  |
| Protection class                    | IP55                   |
| Cable gland size (cable connection) | 1xM20x1,5 1xblind plug |
| Cable gland size (option)           | M16x1,5                |
| Cable gland type                    | Standard               |
| Shaft end                           | 19 x 40                |
| Shaft material                      | C45                    |
| Specification NDE                   | Plastic fan            |


### Additional option

|                    |           |
|--------------------|-----------|
| Protection winding | PTC 150°C |
|--------------------|-----------|

# Dimension drawings

## Three-Phase-Asynchronous- Motor ACA 80 A 4 /HE

### IE2AC08A4002

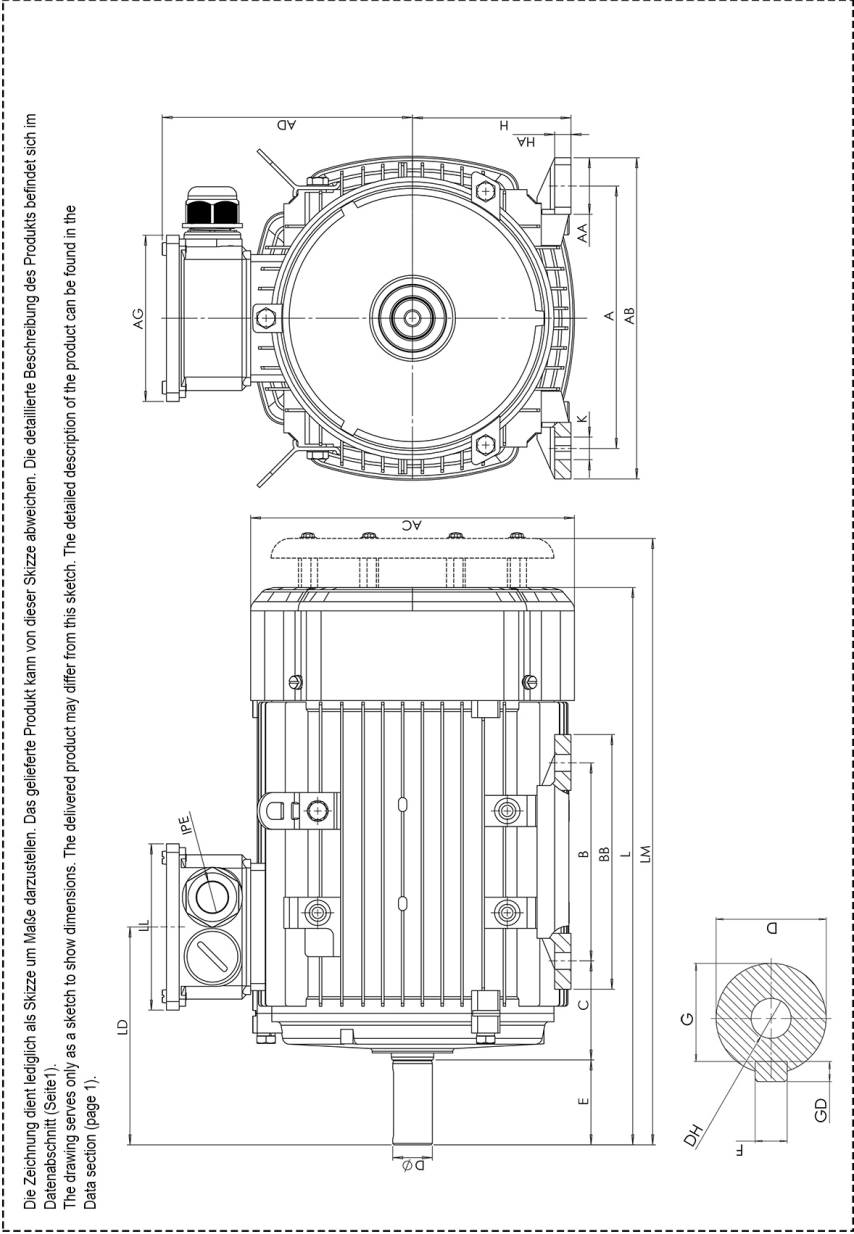

| A   | AA | AB  | AC  | AD  | AG  | B   | BB  | C  | D  | E  | H  | HA | K     | L   | LM  | LD  | LL  | F | G    | DH    | EB | ED | GD |
|-----|----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|-------|-----|-----|-----|-----|---|------|-------|----|----|----|
| 125 | 35 | 157 | 155 | 124 | 101 | 100 | 125 | 50 | 19 | 40 | 80 | 9  | 10x14 | 277 | 307 | 118 | 101 | 6 | 15,5 | M6x16 | 30 | 5  | 6  |