

THREE-PHASE-ASYNCHRONOUS-MOTOR ACA 100 LB 2/4

AC10L2400001

General data

Type of motor	3~ multi speed
Type designation	ACA
Frame size	100
Mounting	B3
Frame execution	L
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	36
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

General data double-speed motors

Power 2 50Hz (kW)	0.8
-------------------	-----

Influent factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	3.1
Frequency (Hz)	50
Voltage 50Hz (V)	380-420
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	YY/Y
Poles	2/4
Efficiency 100% 50Hz (%)	83/73
Power factor	0,89/0,70
Starting current factor	7,5/5,5
Starting torque factor	1,8/1,3
Tilting moment factor	1,8
Rated current 50Hz (A)	6,06/2,26

Mechanical data

Torque (Nm)	10,28/5,46
Rotation speed (1/min)	2880/1400
Bearing DE	6206.ZZ.C3

Mechanical data

Bearing NDE	6206.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	1125
allow. Radial load (X0)	1250
allow. Radial load (Xmax)	1000
allow. Axial load B3,B5,B35,B14,B34	950
allow. Axial load V1,V3,V19,V18	905
Moment of inertia	0.0029

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM25x1,5 1xblind plug
Cable gland size (option)	M16x1,5
Cable gland type	Standard
Shaft end	28 x 60
Shaft material	C45
Specification NDE	Plastic fan


Additional option

Protection winding	PTC 150°C
--------------------	-----------

Dimension drawings

Three-Phase-Asynchronous- Motor ACA 100 LB 2/4

AC10L2400001

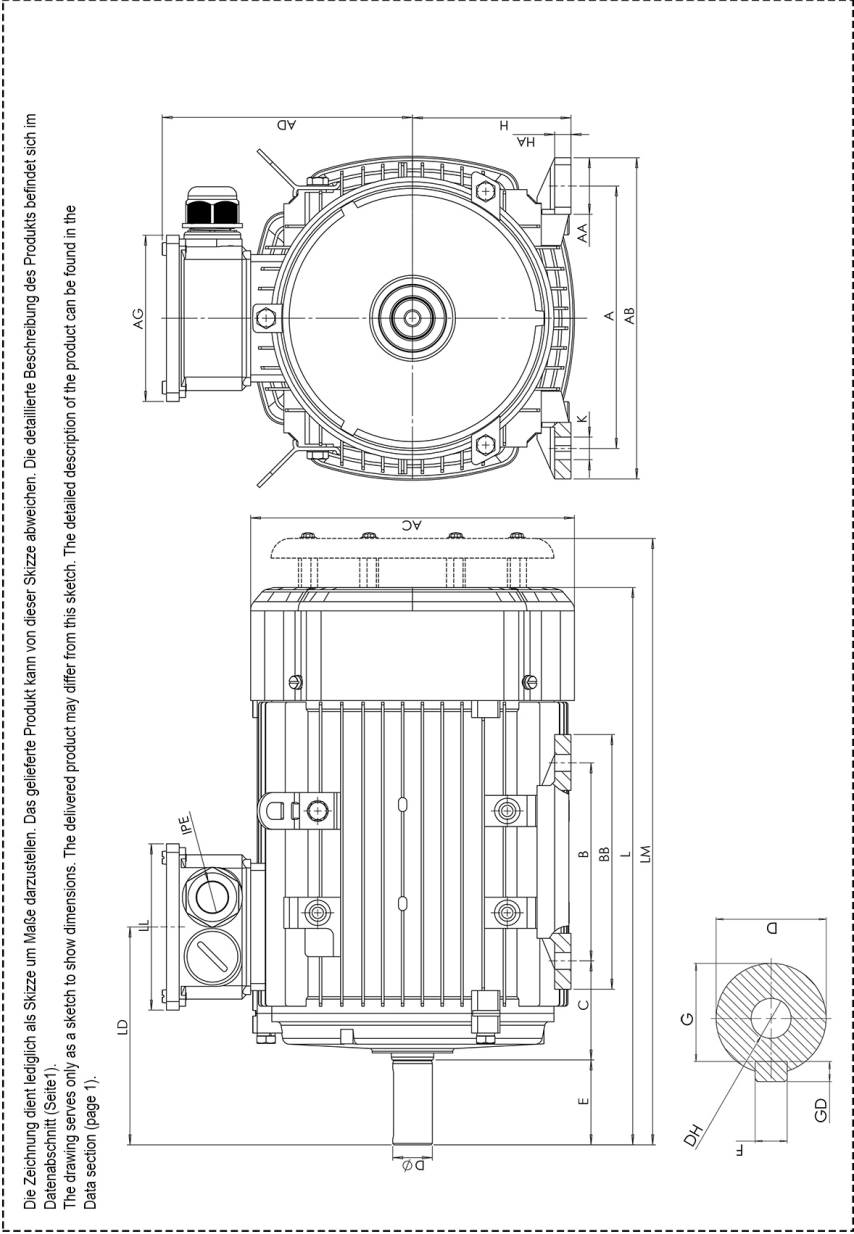

A	AA	AB	AC	AD	AG	B	BB	C	D	E	H	HA	K	L	LM	LL	F	G	DH	EB	ED	GD
160	40	196	195	151	109	140	172	63	28	60	100	11	12x16	374	404	109	8	24	M10x22	50	5	7