

THREE-PHASE-ASYNCHRONOUS-MOTOR ACA 112 M 4 /SPE

IE4AC11M4001

General data

Type of motor	3~
Type designation	ACA
Frame size	112
Mounting	B3
Frame execution	M
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	39.2
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	4
Power 1 60Hz (kW)	4
Frequency (Hz)	50/60
Voltage 50Hz (V)	400/690
Voltage 60Hz (V)	460/795
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	4
Efficiency 100% 50Hz (%)	91,1
Efficiency 75% 50Hz (%)	91,1
Efficiency 50% 50Hz (%)	89,3
Efficiency 100% 60Hz (%)	91
Efficiency 75% 60Hz (%)	91
Efficiency 50% 60Hz (%)	89,2
Power factor	0,82
Starting current factor	7,8
Starting torque factor	2,2
Tilting moment factor	2,3
Rated current 50Hz (A)	7,73/4,48
Rated current 60Hz (A)	6,73/3,90
Eff.Cl.50Hz	IE4

Electrical specification

Eff.Cl.60Hz	IE4
-------------	-----

Mechanical data

Torque (Nm)	26,16/21,81
Rotation speed (1/min)	1460/1752
Bearing DE	6306.ZZ.C3
Bearing NDE	6306.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	1100
allow. Radial load (X0)	1225
allow. Radial load (Xmax)	975
allow. Axial load B3,B5,B35,B14,B34	950
allow. Axial load V1,V3,V19,V18	905
Moment of inertia	0,0134

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM32x1,5 1xblind plug
Cable gland type	Standard
Shaft end	28 x 60
Shaft material	C45
Specification NDE	Plastic fan


Additional operating points

Voltage operating point 2	460/795
Power operating point 2 (kW)	4.8
Connection operating point 2	Δ/Y
Frequency operating point 2	60
Efficiency class operating point 2	IE3

Dimension drawings

Three-Phase-Asynchronous- Motor ACA 112 M 4 /SPE

IE4AC11M4001

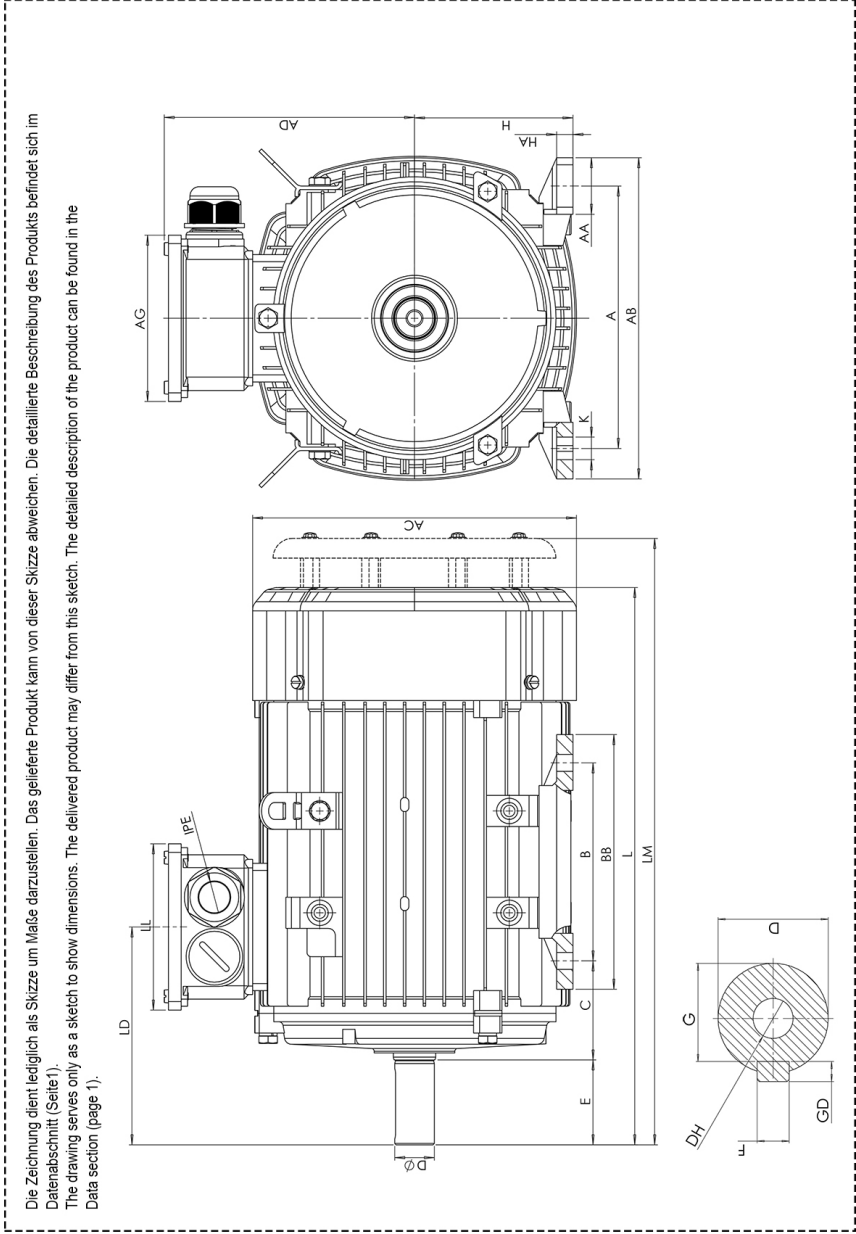

A	AA	AB	AC	AD	AG	B	BB	C	D	E	H	HA	K	L	LM	LL	F	G	DH	EB	ED	GD
190	41	227	219	166	117,5	140	180	70	28	60	112	12	12x16	400	440	117,5	8	24	M10x22	50	5	7