

THREE-PHASE-ASYNCHRONOUS-MOTOR AWM 160 M 4 /PHE

IE3OM16M4002

General data

Type of motor	3~
Type designation	AWM
Frame size	160
Mounting	B3
Frame execution	M
Frame material	Grauguß
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	121
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	11
Power 1 60Hz (kW)	11
Frequency (Hz)	50/60
Voltage 50Hz (V)	400/690
Voltage 60Hz (V)	460/795
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	4
Efficiency 100% 50Hz (%)	91,4
Efficiency 75% 50Hz (%)	91,5
Efficiency 50% 50Hz (%)	88,7
Efficiency 100% 60Hz (%)	92,4
Efficiency 75% 60Hz (%)	91,5
Efficiency 50% 60Hz (%)	88,7
Power factor	0,81
Starting current factor	7,5
Starting torque factor	2,2
Tilting moment factor	2,3
Rated current 50Hz (A)	21,45/12,44
Rated current 60Hz (A)	18,45/10,70
Eff.Cl.50Hz	IE3

Electrical specification

Eff.Cl.60Hz	IE3
-------------	-----

Mechanical data

Torque (Nm)	71,20/59,36
Rotation speed (1/min)	1475/1770
Bearing DE	6309.ZZ.C3
Bearing NDE	6309.ZZ.C3
Mounting of bearing DE	fixed bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	2630
allow. Radial load (X0)	3000
allow. Radial load (Xmax)	2330
allow. Axial load B3,B5,B35,B14,B34	2100
allow. Axial load V1,V3,V19,V18	1720
Moment of inertia	0,10676

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	2xM40x1,5
Cable gland size (option)	M20x1,5
Cable gland type	Standard
Shaft end	42 x 110
Shaft material	C45
Specification NDE	Plastic fan

Additional operating points

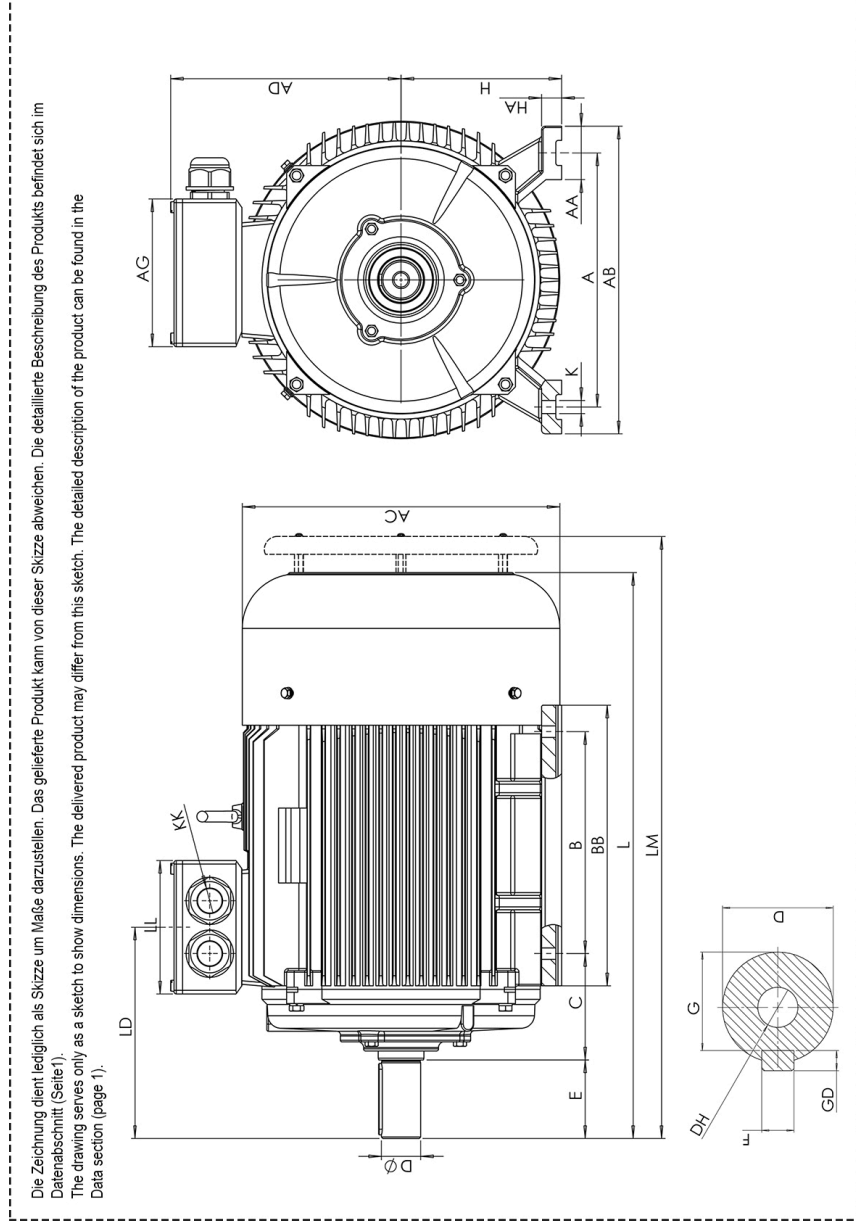
Voltage operating point 2	460/795
Power operating point 2 (kW)	13.2
Connection operating point 2	Δ/Y
Frequency operating point 2	60
Efficiency class operating point 2	IE2

Additional option

Protection winding	PTC 150°C
Condensate draining hole	✓
Condensate draining hole sealing screw	✓
Oil sealed	✓

Three-Phase-Asynchronous-
Motor AWM 160 M 4 /PHE

IE3OM16M4002

[illegible]