

THREE-PHASE-ASYNCHRONOUS-MOTOR ACM 160 L 2 /SPE

IE4AC16L2000

General data

Type of motor	3~
Type designation	ACM
Frame size	160
Mounting	B3
Frame execution	L
Frame material	Grauguß
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	160
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	18.5
Power 1 60Hz (kW)	18.5
Frequency (Hz)	50/60
Voltage 50Hz (V)	400/690
Voltage 60Hz (V)	460/795
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	2
Efficiency 100% 50Hz (%)	93,7
Efficiency 75% 50Hz (%)	91,8
Efficiency 50% 50Hz (%)	93,7
Efficiency 100% 60Hz (%)	93
Efficiency 75% 60Hz (%)	93
Efficiency 50% 60Hz (%)	91,1
Power factor	0,89
Starting current factor	8,2
Starting torque factor	2,0
Tilting moment factor	2,3
Rated current 50Hz (A)	32,02/18,56
Rated current 60Hz (A)	28,54/16,27
Eff.Cl.50Hz	IE4

Electrical specification

Eff.Cl.60Hz	IE4
-------------	-----

Mechanical data

Torque (Nm)	59,68/49,75
Rotation speed (1/min)	2960/3552
Bearing DE	6209.ZZ.C3
Bearing NDE	6209.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	fixed bearing
Bearing lifetime	20000
allow. Radial load (X/2)	2375
allow. Radial load (X0)	2650
allow. Radial load (Xmax)	2100
allow. Axial load B3,B5,B35,B14,B34	1224
allow. Axial load V1,V3,V19,V18	1144
allow. Axial load V5,V6,V15,B36	500
Moment of inertia	0,059

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM40x1,5 1xblind plug
Cable gland size (option)	M20x1,5
Cable gland type	Standard
Shaft end	42 x 110
Shaft material	C45
Specification NDE	Plastic fan

Additional operating points

Voltage operating point 2	460/795
Power operating point 2 (kW)	22.2
Connection operating point 2	Δ/Y
Frequency operating point 2	60
Efficiency class operating point 2	IE3

Additional option

Protection winding	PTC 150°C
--------------------	-----------


Dimension drawings

Three-Phase-Asynchronous-

Motor ACM 160 L 2 /SPE

IE4AC16L2000

ac motoren

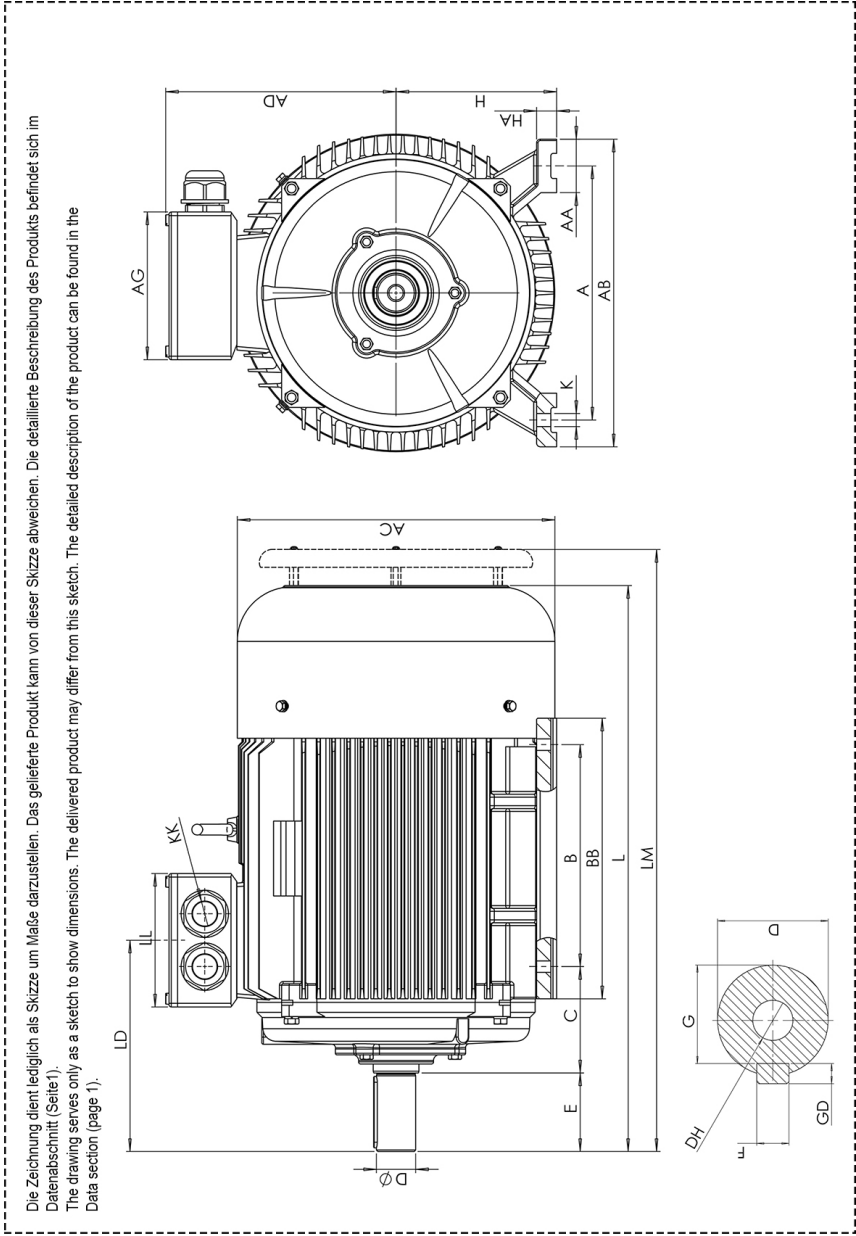

A	AA	AB	AC	AD	AG	B	BB	C	D	E	H	HA	K	L	LM	LD	LL	F	G	DH	EB	ED	GD
254	65	319	335	260	162	254	320	108	42	110	160	20	14,5	703	748	256	152	12	37	M16x36	90	10	8