

THREE-PHASE-ASYNCHRONOUS-MOTOR FCA 63 C 4 /HE

IE2AC06B4200

General data

Type of motor	3~ progressiv
Type designation	FCA
Frame size	63
Mounting	B14a
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	5.5
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

Electrical specification

Power 1 50Hz (kW)	0.25
Power 1 60Hz (kW)	0.25
Frequency (Hz)	50/60
Voltage 50Hz (V)	230/400
Voltage 60Hz (V)	265/460
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	4
Efficiency 100% 50Hz (%)	68,5
Efficiency 75% 50Hz (%)	68,5
Efficiency 50% 50Hz (%)	67,1
Efficiency 100% 60Hz (%)	70,0
Efficiency 75% 60Hz (%)	68,5
Efficiency 50% 60Hz (%)	67,1
Power factor	0,74
Starting current factor	5,2
Starting torque factor	2,1
Tilting moment factor	2,2
Rated current 50Hz (A)	1,24/0,72
Rated current 60Hz (A)	0,84/0,49
Eff.Cl.50Hz	IE2
Eff.Cl.60Hz	IE2

Mechanical data

Torque (Nm)	1,79/1,49
Rotation speed (1/min)	1335/1602
Bearing DE	6201.ZZ.C3
Bearing NDE	6201.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	375
allow. Radial load (X0)	400
allow. Radial load (Xmax)	350
allow. Axial load B3,B5,B35,B14,B34	350
allow. Axial load V1,V3,V19,V18	335
Moment of inertia	0,0003

Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM20x1,5 1xblind plug
Cable gland size (option)	M16x1,5
Cable gland type	Standard
Shaft end	11 x 23
Shaft material	C45
Specification NDE	Plastic fan
Flange	90


Additional option

Protection winding	PTC 150°C
--------------------	-----------

Dimension drawings

Three-Phase-Asynchronous- Motor FCA 63 C 4 /HE

IE2AC06B4200

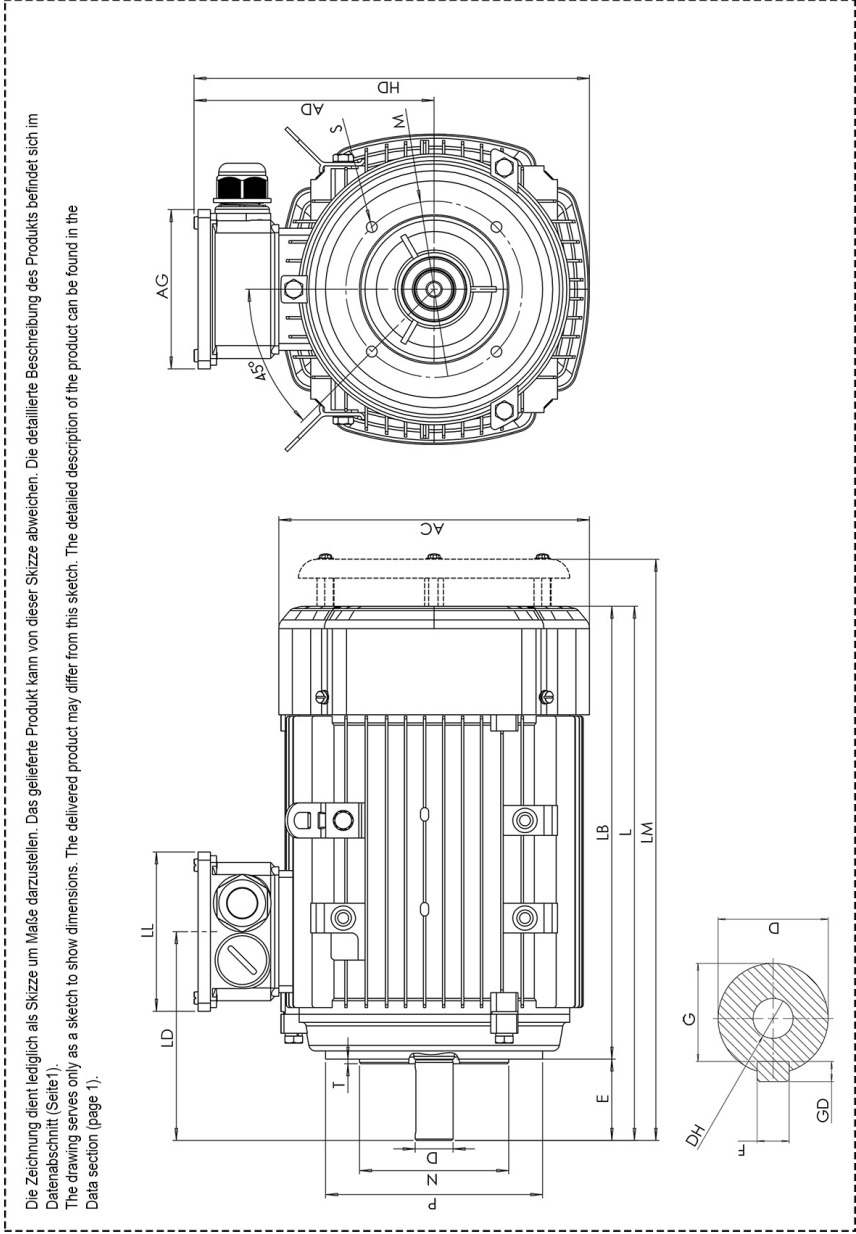

AC	AD	AG	D	E	HD	L	LM	LA	LB	LL	M	N	P	S	T	F	G	DH	EB	ED	GD
120	102	101	11	23	162	217	247	10	194	101	75	60	90	4xM5	3	4	8,5	M4x12	16	3,5	4